

COFFEE TO GO



Coffeemar XL 46

COFFEEMAR XL46
COFFEEMAR BLUE XL 46



COFFEEMAR BLUETEC XL 46 CTG



COLOR



COFFEEMAR XL 46 CTG



COFFEEMAR XL 46



The Coffeemar XL 46 model has been specially designed to offer a **large takeaway coffee**, and to enable the dispensing of **two types of coffee in the same machine**. Applying the technology developed by Jofemar for its Coffeemar machine range, which allows all the quality of the coffee beans to be extracted, and includes the best presentations for a vending machine.



PRESSURE VALVE IN
THE DISTRIBUTION UNIT



ANTI-VANDALISM PLATE
CLOSURE



J-SUITE



MONITORED WATER
DISTRIBUTOR,
NO SOLENOID VALVES



CUSTOMIZED SETUP TO SUIT
YOUR REQUIREMENTS



CAPACITIVE
KEYBOARD



PAYMENT SYSTEMS
WITH WALLET AND
CARD HOLDER



FINGERPRINT-
RESISTANT
STAINLESS STEEL

Main features

MACHINE NAME	Unpacked MEASUREMENT	WEIGHT	CONSUMPTION	SERVICES	CANISTER	MIXER	PAYMENT METHOD
COFFEEMAR XL 46 CTG	1.830 x 755 x 584 mm	170 kg	230V/2600W	500	6 cabinet + sugar + 2 coffee beans	4	Configurable
COFFEEMAR BLUETEC XL 46 CTG	1.830 x 755 x 584 mm	170 kg	230V/2600W	500	6 cabinet + sugar + 2 coffee beans	4	Configurable

FEATURES

- **Pressure valve** in group of delivery to maintain constant pressure throughout the delivery cycle.
- Motorized water distributor without solenoid valves.
- **Aluminium boiler** with resistance and encapsulated probes, **without contact with water** (avoiding O-rings and limescale creation).
- **Extractor for glasses** up to 80mm in diameter and 117 mm high, 350 ml.
- **Delivery of lids for the glass**, with the possibility of pre-selection of these and surcharge in price.
- **Adjustable brush dispenser** between 75 mm and 115 mm long.
- **Mixing circuit self-washing**, product output: manual or automatic (programmable).
- System for adding **anti-steam sugar** directly to the glass.
- Constant **temperature control** in the water boiler.
- Braking at the exit gate.
- **Easy cleaning** and maintenance of removable elements.
- Express delivery speed (programmable).
- **Double dispensing group** with the option of simultaneous operation with the same type of coffee, the option of two different types of coffee or the option of coffee and tea on a leaf.

DESING

Our Coffeemar XL46 machine has a perfect combination of innovation and modern aesthetics. Its double dispensing group, two coffee tanks and double water circuit stand out, which combined allow you to offer a coffee of up to 16 gr, dispensed in up to 350ml of water, in less than 30 seconds.

- Furniture in steel treated against corrosion and **anti-vandal closure** with integrated door in the cabin.
- **Front in tempered glass** embedded in metal, without access to the side edges and capacitive keyboard in the Bluetec option.
- **Capacitive keyboard** in the Bluetec option and membrane keyboard in the Coffeemar XL 46 option.
- Independent recovery key, backlit.
- **Product collection drawer illuminated** with white LED and with the option to be controlled.






OPTIONS

- **Extractor for glasses** up to 80mm in diameter and 117mm high, 350ml.
- **Self-contained water kit** (one or two tanks of 25 l each).
- **Water filters:** water softener or flavor filter.
- **Delivery of lids for the glass**, with the possibility of pre-selection of these and surcharge on the price.
- Possibility of having 2 containers of grain + 6 of soluble + the container of sugar.
- **Palette** dispenser.

PROGRAMMING

- Option to **extract data** with J-SUITE via J-LINK.
- It incorporates a **display module where product information can be displayed.**
- DEX connector as the only solution for **accounting and telemetry extraction.**
- **Programming button** to access the different menus of the machine.
- Interactive adjustment of **programming options** using the machine's own graphic display.

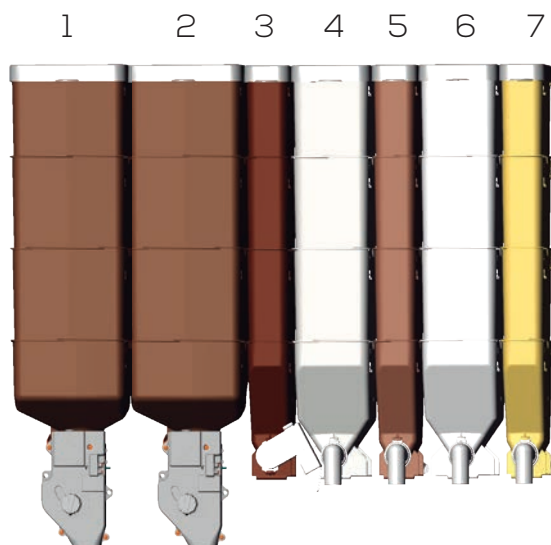

	CANISTER	CAPACITY (gr)	SERVICES
1	COFFEE BEANS	3.736	530
2	COFFEE BEANS	3.736	530
3	CHOCOLATE	2.020	115
4	MILK	2.770	334
5	DECAFFEINATION	780	480
6	OPTIONAL (Matcha tea, Broth, Chamomile...)	-	-
7	TEA	2.460	375
	SUGAR	4.620	-

*This information is general because it depends on the programming and the product extracted.

TELEMETRY



Our Jofemar electronic system J-LINK offers a wide range of functionalities to all our machines. One of them is the ability to use J-SUITE, our comprehensive and unified solution for machine management that allows you full control of the machine from anywhere in the world.



ADVANTAGES

- Compatibility across all Jofemar machines; you can use J-SUITE on all our products.
- Total stock control.
- Remote machine control from your computer, tablet, or mobile device.
- Compatible with other payment systems.
- Option to have a closed circuit card reader.
- Compatible with non-Jofemar machines through standard protocols.
- Control of product weight, cups and pallets.
- Control of product weight, cups and pallets.
- Control of product compositions.



COST CUTTING



**REAL-TIME STOCK
CONTROL**



**CUSTOMER
SATISFACTION**



**AGILITY IN
ACCOUNTING**



**OPERATIONS
ENHANCEMENT**



**ADMINISTRATIVE
OPTIMIZATION**



**ENHANCED
INFORMATION SECURITY**



Innovation
technology

Reliability



Jofemar
CORPORACIÓN

Ctra. Marcilla km 2
31350 Peralta · Navarra · España

Tel. +34 948 75 12 12

Fax +34 948 75 04 20

nacional@jofemar.com

www.jofemar.com



100% Jofemar
Technology

CE



VE-CT208EN001 0425