



QENDRA PRO TOUCH

QENDRA PRO TOUCH
QENDRA PRO TOUCH[®]



QENDRA PRO TOUCH

COLOR



QENDRA PRO TOUCH

QENDRA PRO TOUCH represents a further step in the evolution of Jofemar's vending solutions. This model has been designed to offer a more complete, visual and accessible shopping experience, thanks to its 43" touchscreen, which allows a fluid and personalized interaction with the user. QENDRA PRO TOUCH is designed for demanding environments, where visibility, reliability and flexibility make all the difference.



ANTI-VANDALISM PLATE
CLOSURE



OPTIMIZATION,
CAPACITY AND VOLUME



J-SUITE



INCLUSIVE
DESIGN



PRODUCT DELIVERY
DETECTION PHOTOCELLS



CONFIGURATION
ACCORDING TO NEEDS



ELEVATOR



TOUCH
SCREEN

Main features



MACHINE NAME	Unpacked MEASUREMENT	WEIGHT	CONSUMPTION	ELEVATOR	COOLING UNIT	KEYBOARD	PAYMENT METHOD
QENDRA PRO TOUCH	1995x802x1104	378 kg	230V/146W	Yes	No	Touchscreen 43"	Bank card reader
QENDRA PRO TOUCH ^o	1995x802x1134	419 kg	230V/500W	Yes	Yes	Touchscreen 43"	Bank card reader

QENDRA PRO TOUCH



FEATURES

- 43" interactive touch screen that allows intuitive navigation, personalization of the shopping experience.
- New generation central lift, designed to pick up products at an ergonomic height, ideal for long items. It guarantees a safe, shock-free, and product-friendly delivery.
- Advanced security system in the elevator and in the automatic collection door, which protects against theft and accidents.
- Up to 8 trays with up to 10 adjustable channels, offering greater interior capacity and flexibility in configuration.
- Possibility to program the temperature and have an interior temperature of 2°C to 25°C in our QENDRA PRO TOUCH°. Optimal conditions according to the type of product.
- Operation in environments with up to 65% relative humidity.
- Detection of correct sale by means of photocells, which ensure the effective delivery of the product.
- Programming of expiration date by channel or selection number, inhibiting the sale of expired products.
- Change of channels and partitions without tools, facilitating adaptation to new products.
- Multi-sales system, capable of delivering several products in a single operation.
- FIFO (First In First Out) system, which guarantees continuous stock rotation.

DESIGN

The QENDRA PRO TOUCH stands out for its 43" touchscreen and matte black finish. Its sleek, minimalist design transforms any space into a modern and sophisticated experience.

- Elegant and robust design, with matte black finishes and the option of graphic customization with corporate image.
- 43" touchscreen integrated into the front, which brings modernity and improves user interaction.
- Central collection drawer with automatic opening and closing system, which improves the shopping experience and facilitates access to the product.
- Product collection area dimensions of 286x558 mm.
- Modular structure protected against corrosion and rust, designed for a long service life in any environment.
- Two positions: one for transport and one for installation, which avoid problems arising from their height during installation.






OPTIONS

- Option to have a cooling group on our QENDRA PRO TOUCH®.
- Dispensing ramp for fragile products.
- Internal heater kit capable of keeping the inside of the machine 25°C above ambient temperature, up to a maximum of 25°C. It prevents accidental freezing of products due to external environmental causes and tempers products that require it as long as they do not saturate the interior with moisture.
- Version with SBC and application for Jofemar screens or version with PC and application customized by the customer.
- Possibility of equipping a bank card holder or other peripheral using the EVA egg available on the front.
- Possibility of equipping a router or preparing for its installation.


PROGRAMMING

- Possibility of programming the interior temperature of the machine between 2°C and 25°C.
- Consultation of all accounting information and machine status in a timely manner
- remote from J-Suite.
- Make product changes with images and prices remotely from J-Suite.
- Collection and sending of machine condition data to the control JSD device in order to inhibit the sale of spoiled product.
- Control up to 3 satellite machines or 2 satellite machines + 4 Lockers.

CAPACITY DIAGRAM

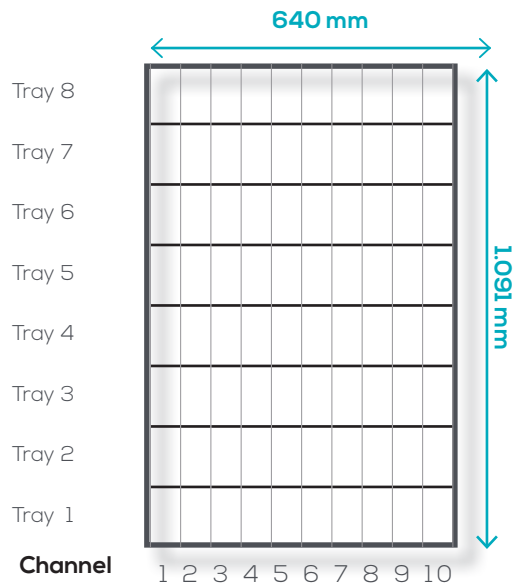

WIDE TRAYS

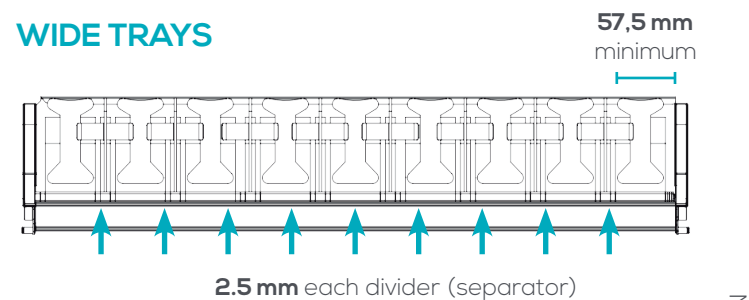

CHANNEL DEPTH



HEIGHT TABLE

Holes visible	Distance between trays	Product height pusher	Product height on pallet
8	135	94,5	76
10	162	121,5	103
12	189	148,5	130
14	216	175,5	157
16	243	202,5	184
18	270	229,5	211
20	297	256,5	238
22	324	283,5	265
24	351	310,5	292
26	378	337,5	319

Flexibility in tray between 1 to maximum of 10 motors.

TELEMETRY



Our Jofemar electronic system **J-LINK** offers a wide range of functionalities to all our machines. One of them is the ability to use J-SUITE, our comprehensive and unified solution for machine management that allows you full control of the machine from anywhere in the world.

ADVANTAGES

- Compatibility with all Jofemar machines. You can use J-SUITE with all our products. Total stock control.
- Sending of technical and administrative alerts.
- Remote control of the machines from your computer, tablet, or mobile phone.
- Compatible with other payment systems.
- Option to have a closed-loop card reader.
- Compatible with non-Jofemar machines through standard protocols.
- Maximum data storage security.
- Automatic daily data backups.
- Full availability at any time.
- Access to sales statistics.



COST CUTTING



**REAL-TIME STOCK
CONTROL**



**CUSTOMER
SATISFACTION**



**AGILITY IN
ACCOUNTING**



**OPERATIONS
ENHANCEMENT**



**ADMINISTRATIVE
OPTIMIZATION**



**ENHANCED
INFORMATION SECURITY**





Innovation
technology

Reliability

100% Jofemar
Technology



Jofemar
CORPORACIÓN

Ctra. Marcilla km 2
31350 Peralta · Navarra · España

Tel. +34 948 75 12 12

Fax +34 948 75 04 20

nacional@jofemar.com

www.jofemar.com



VE-CT218EN001 0825