



QENDRA TOUCH

QENDRA TOUCH
QENDRA TOUCH^o



QENDRA TOUCH

QENDRA TOUCH

COLOR



QENDRA TOUCH

QENDRA TOUCH marks a new milestone in the evolution of Jofemar's vending machines. This new model combines a robust and technological design with the exclusive extraction system adaptable to any type of product. Its integrated touchscreen transforms the shopping experience, making it more intuitive, modern and autonomous. In addition, it incorporates the brand's latest innovation: a high-capacity central lift that guarantees fast, precise and respectful delivery, both with the product and with the end user.



ANTI-VANDALISM PLATE
CLOSURE



OPTIMIZATION,
CAPACITY AND VOLUME



J-SUITE



PERIMETER RGB
LED LIGHT



PRODUCT DELIVERY
DETECTION PHOTOCELLS



CONFIGURATION
ACCORDING TO NEEDS



ELEVATOR



TOUCH
SCREEN

Main features



MACHINE NAME	Unpacked MEASUREMENT	WEIGHT	CONSUMPTION	ELEVATOR	COOLING UNIT	KEYBOARD	PAYMENT METHOD
QENDRA TOUCH	1862x802x1094	362 kg	230V/106W	Yes	No	Touchscreen 32"	No
QENDRA TOUCH ^o	1862x802x1124	403 kg	230V/460W	Yes	Yes	Touchscreen 32"	No


FEATURES

- 32" interactive touch screen that allows intuitive navigation, personalization of the shopping experience.
- New generation central lift, designed to pick up products at an ergonomic height, ideal for long items. It guarantees a safe, shock-free, and product-friendly delivery.
- Advanced security system in the elevator and in the automatic collection door, which protects against theft and accidents.
- Up to 8 trays with up to 10 adjustable channels, offering greater interior capacity and flexibility in configuration.
- QENDRA TOUCH® with the possibility of programming the temperature and having an interior temperature of 2°C to 25°C. Optimal conditions according to the type of product.
- Operation in environments with up to 65% relative humidity.
- Detection of correct sale by means of photocells, which ensure the effective delivery of the product.
- Programming of expiration date by channel or selection number, inhibiting the sale of expired products.
- Change of channels and partitions without tools, facilitating adaptation to new products.
- Multi-sales system, capable of delivering several products in a single operation.
- FIFO (First In First Out) system, which guarantees continuous stock rotation.

DESIGN

With a matte black finish, 32" touchscreen and central collection drawer, the QENDRA TOUCH stands out for its modern and functional aesthetics. Its configurable RGB perimeter LED lighting allows the color to be adapted to the environment, reinforcing its presence and creating an immersive visual experience.

- Elegant and robust design, with matte black finishes and the option of graphic customization with corporate image.
- 32" touchscreen integrated into the front, which provides modernity and improves user interaction.
- Configurable RGB perimeter LED lighting, which allows the color to be adapted to the environment and reinforces the visual presence of the machine.
- Central collection drawer with automatic opening and closing system, which improves the shopping experience and facilitates access to the product.
- Product collection area dimensions of 286x558 mm.
- Modular structure protected against corrosion and rust, designed for a long service life in any environment.

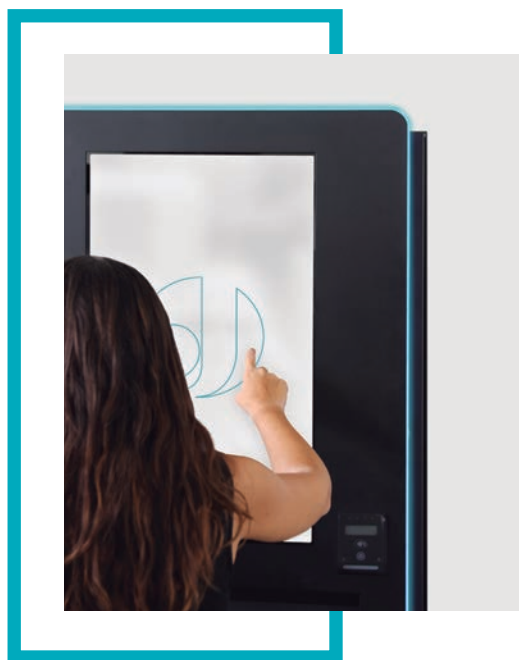




OPTIONS

- Option to have a cooling group on our QENDRA TOUCH®.
- Dispensing ramp for fragile products.
- Assembly of different types of locks according to the customer's needs.
- Internal heater kit capable of keeping the inside of the machine 25°C above ambient temperature, up to a maximum of 25°C. It prevents accidental freezing of products due to external environmental causes and tempers products that require it as long as they do not saturate the interior with moisture.
- Version with SBC and application for Jofemar screens or version with PC and application customized by the customer.
- Possibility of equipping bank card holders or other peripherals using the EVA egg available on the front.


PROGRAMMING

- Possibility of programming the interior temperature of the machine between 2°C and 25°C.
- Consultation of all accounting information and machine status in a timely manner
- remote from J-Suite.
- Make product changes with images and prices remotely from J-Suite.
- Collection and sending of machine condition data to the control JSD device in order to inhibit the sale of spoiled product.
- Control up to 3 satellite machines or 2 satellite machines + 4 Lockers.

CAPACITY DIAGRAM

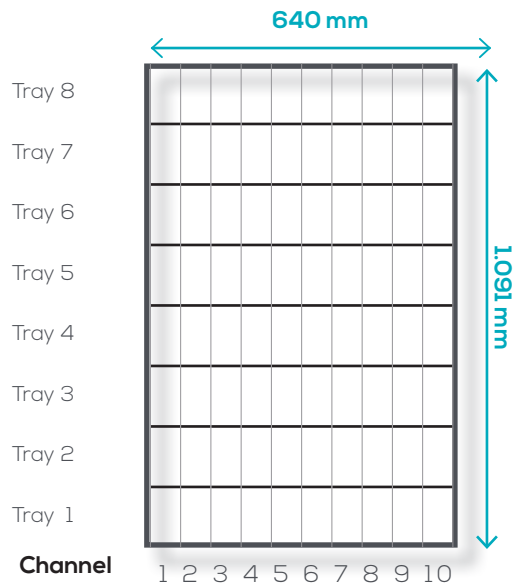

WIDE TRAYS

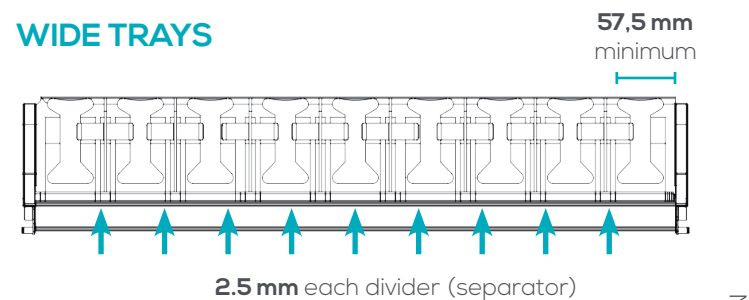

CHANNEL DEPTH



HEIGHT TABLE

Holes visible	Distance between trays	Product height pusher	Product height on pallet
8	135	94,5	76
10	162	121,5	103
12	189	148,5	130
14	216	175,5	157
16	243	202,5	184
18	270	229,5	211
20	297	256,5	238
22	324	283,5	265
24	351	310,5	292
26	378	337,5	319

Flexibility in tray between 1 to maximum of 10 motors.

TELEMETRY



Our Jofemar electronic system **J-LINK** offers a wide range of functionalities to all our machines. One of them is the ability to use J-SUITE, our comprehensive and unified solution for machine management that allows you full control of the machine from anywhere in the world.



ADVANTAGES

- Compatibility with all Jofemar machines. You can use J-SUITE with all our products. Total stock control.
- Sending of technical and administrative alerts.
- Remote control of the machines from your computer, tablet, or mobile phone.
- Compatible with other payment systems.
- Option to have a closed-loop card reader.
- Compatible with non-Jofemar machines through standard protocols.
- Maximum data storage security.
- Automatic daily data backups.
- Full availability at any time.
- Access to sales statistics.



COST CUTTING



**REAL-TIME STOCK
CONTROL**



**CUSTOMER
SATISFACTION**



**AGILITY IN
ACCOUNTING**



**OPERATIONS
ENHANCEMENT**



**ADMINISTRATIVE
OPTIMIZATION**



**ENHANCED
INFORMATION SECURITY**



Innovation
technology

Reliability



Jofemar
CORPORACIÓN

Ctra. Marcilla km 2
31350 Peralta · Navarra · España

Tel. +34 948 75 12 12

Fax +34 948 75 04 20

nacional@jofemar.com

www.jofemar.com



100% Jofemar
Technology



VE-CT218EN001 0825