




vision ESPLUS V8

ESPLUS AMBIENT V8
ESPLUS R290 V8
ESPLUS REFRIGER V8



COLOR



VISION ESPLUS V8

Our **space-efficient Vision** EsPlus V8 is the perfect solution for product dispensing. It has up to 8 trays of up to 10 channels, **a large product delivery elevator** and an **optional refrigeration group**. The modular design and versatility is one of its greatest advantages. It is possible to connect the machine to a control module or another master machine, significantly increasing the number of channels and the storage capacity in a point of sale to house any type of product.



ANTI-VANDALISM PLATE
CLOSURE



OPTIMIZATION, CAPACITY
AND VOLUME



J-SUITE



PRODUCT DELIVERY
DETECTION PHOTOCELLS



EASY FLEX DELIVERY
SYSTEM



ELEVATOR

Main features



MACHINE NAME	Unpacked MEASUREMENT	WEIGHT	CONSUMPTION	ELEVATOR	COOLING UNIT	KEYBOARD	PAYMENT METHOD
ESPLUS AMBIENT V8	1835 x 800 x 995	305kg	230V / 30W	Yes	No	No	No
"ESPLUS REFRIGER V8 EPREL ESPLUS R290 V8: D	1835 x 800 x 1025	337kg	230V/ 370W	Yes	Yes	No	No
ESPLUS BLUETEC AMBIENT V8	1835 x 800 x 995	305kg	230V / 30W	Yes	No	No	No
ESPLUS BLUETEC RE- FRIGER V8 EPREL ESPLUS R290 V8: D	1835 x 800 x 1025	337kg	230V/ 370W	Yes	Yes	No	No

*The three ESPLUS models in standard, TE, and WE versions can be distributed in the BLUETEC version.

ESPLUS V8

ESPLUS BLUETEC TE V8



FEATURES


- **Capacity** up to 8 trays of up to 10 height-adjustable channels.
- **Temperature** with or without cold group.
- Possibility to **program the temperature** and have an interior temperature of 4°C to 25°C.
- Operation in environments with **65% maximum humidity**.
- Possibility of **holding a total of 100Kg of product**.
- **Detection of correct sales** by means of photocells.
- Continuous **self-test** of operation.
- **Expiration date programming** by selection number or channel. It inhibits the sale of these products.
- **Flexible configuration**. Easy to change the position of channels and partitions without tools.
- Intelligent or manual auto-adjustment of the push force for each channel, adapting to the characteristics of each product.
- **Large capacity elevator** with the option of transparent areas (elevator and window) that allow the customer to have a better view of the product delivery cycle.
- **Multi-sales system**, capable of delivering several products in a single manoeuvre.
- **FIFO system** (First in First out) , which ensures continuous product renewal.

DESIGN

Our ESPLUS V8 machines, thanks to their adjustable channel system, have the **advantage of adapting to any type of product**. In addition, they have cutting-edge technology and an elegant and innovative design, resulting in a machine with high capacity and great product control.

- Elegant and robust **design with four different finishes for the door** (white, black, grey or Bluetec) and with the option of personalisation with corporate branding.
- **LED lighting** with selective on/off programming.
- **Transparent front of 1,169 x 714 mm**, which allows us a wide view of our product.
- Modular structure in furniture protected against corrosion and rust.
- **Large capacity elevator**, with the option of being transparent (EsPlus TE) and with perimeter lighting.






OPTIONS

- **EsPlus TE: illuminated transparent elevator and door with window** at the bottom. Perimeter lighting on the product exit door.
- **EsPlus WE: illuminated transparent elevator** and windowless door. Perimeter lighting on the product exit door.
- **EsPlus standard: standard elevator** and windowless door.
- It can incorporate a **cooling group**.
- Assembly of different **types of locks** according to the customer's needs.
- Internal **heater kit** capable of keeping the products inside the machine up to 20°C above the ambient temperature. It prevents accidental freezing of products due to external environmental causes and tempers products that require it as long as they do not saturate the interior with moisture.


PROGRAMMING

- Possibility of **programming the interior temperature** of the machine between 4°C and 25°C.
- **Machine control** by means of a control module or a master machine connected via an RS232 communication port, both commanded by a JSD device, capable of simultaneously controlling four vending machines or three machines and four locker modules with a total of eighty compartments.
- **Collection and sending of machine condition data** to the control JSD device in order to inhibit the sale of spoiled product.


CAPACITY DIAGRAM

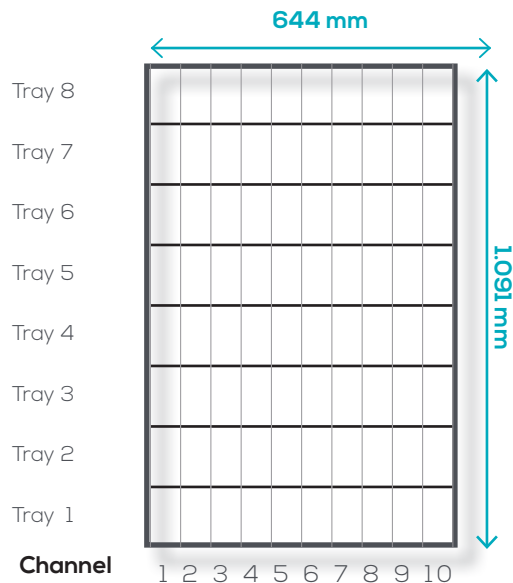

WIDE TRAYS

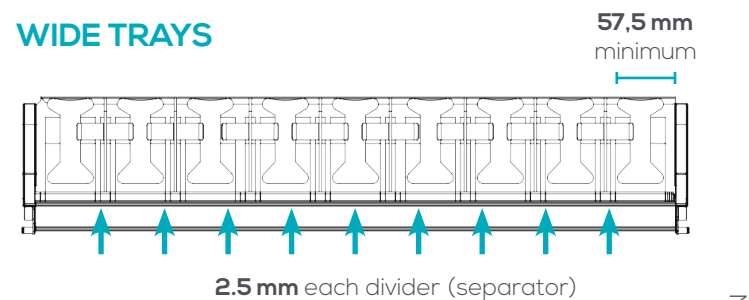

CHANNEL DEPTH

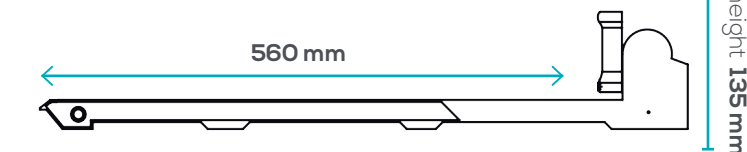

HEIGHT TABLE

Holes visible	Distance between trays	Product height pusher	Product height on pallet
8	135	94,5	76
10	162	121,5	103
12	189	148,5	130
14	216	175,5	157
16	243	202,5	184
18	270	229,5	211
20	297	256,5	238
22	324	283,5	265
24	351	310,5	292
26	378	337,5	319

Flexibility in tray between 1 to maximum of 10 motors.

TELEMETRY



Our Jofemar electronic system **J-LINK** offers a wide range of functionalities to all our machines. One of them is the ability to use J-SUITE, our comprehensive and unified solution for machine management that allows you full control of the machine from anywhere in the world.

ADVANTAGES

- Compatibility with all Jofemar machines. You can use J-SUITE with all our products. Total stock control.
- Sending of technical and administrative alerts.
- Remote control of the machines from your computer, tablet, or mobile phone.
- Compatible with other payment systems.
- Option to have a closed-loop card reader.
- Compatible with non-Jofemar machines through standard protocols.
- Maximum data storage security.
- Automatic daily data backups.
- Full availability at any time.
- Access to sales statistics.



COST CUTTING



**REAL-TIME STOCK
CONTROL**



**CUSTOMER
SATISFACTION**



**AGILITY IN
ACCOUNTING**



**OPERATIONS
ENHANCEMENT**



**ADMINISTRATIVE
OPTIMIZATION**



**ENHANCED
INFORMATION SECURITY**





Innovation
technology

Reliability



Jofemar
CORPORACIÓN

Ctra. Marcilla km 2
31350 Peralta · Navarra · España

Tel. +34 948 75 12 12

Fax +34 948 75 04 20

nacional@jofemar.com

www.jofemar.com



100% Jofemar
Technology



VE-CT208EN001 0425