



Coffeemar G546

COFFEEMAR G546D
COFFEEMAR BLUETEC546



COFFEEMAR G546



COLOR



COFFEEMAR BLUE TEC G546



COFFEEMAR G546

Unique in the market with a pressure valve in the brewing group, which is pressurized from the start, allowing the extraction of all the essence and aroma of the coffee from the first to the last drop. Additionally, it features an aluminum boiler and a motorized water distributor without solenoid valves. Its Bluetec version also stands out for its capacitive product selection keyboard, as well as aesthetic improvements.



**PRESSURE VALVE IN
THE BREWING GROUP**



**ANTI-VANDAL
PLATE LOCK**



J-SUITE



**MOTORIZED WATER
DISTRIBUTOR, WITHOUT
SOLENOID VALVES**



**CUSTOMIZED SETUP TO SUIT
YOUR REQUIREMENTS**



**CAPACITIVE
KEYBOARD**



**PAYMENT SYSTEMS
WITH COIN AND CARD
READERS**

Main Features

MACHINE NAME	Unpacked MEASUREMENT	WEI- GHT	CONSUMP- TION	SERVICES	CANISTER	MIXER	PAYMENT METHOD
COFFEEMAR G546	1833 x 600 x 584 mm	142kg	230V / 1150W	500	5 cabinet + sugar + coffee beans	4	Configurable
COFFEEMAR BLUETEC G546	1833 x 600 x 602 mm	140kg	230V / 1150W	500	5 cabinet + sugar + coffee beans	4	Configurable

FEATURES



- **Pressure valve** in the brewing group to maintain constant pressure throughout the brewing cycle.
- **Aluminum boiler** with encapsulated heating elements and probes, without contact with water (avoiding O-rings and lime build-up).
- **Two models of cup extractors** depending on their diameter (65-67 mm or 67-69 mm).
- Adjustable **stirrer** dispenser between 75 mm and 115 mm in length.
- **Auto-cleaning of the mixing circuit**, product outlet: manual or automatic (programmable).
- **Anti-steam sugar** addition system directly into the cup.
- **Constant temperature control** in the water boiler.
- **Motorized water distributor**, without solenoid valves.
- **Braking at the product outlet gate.**
- **Own coffee bean grinding group.**
- **Easy cleaning and maintenance** of removable elements.

DESIGN

Our Coffeemar G546 combines a sophisticated design that adapts to any environment. Its design ensures an exceptional coffee experience, offering unparalleled taste and quality in every cup.

- **Graphic Display** 92x53mm long.
- **Cabinet** made of corrosion-resistant **treated steel** and anti-vandalism lock with integrated door in the cabin (anti-lever).
- Bluetec version with **a fingerprint-resistant stainless-steel finish** and **a tempered glass** front embedded in metal, without access to its side edges.






OPTIONS

- **Autonomous water kit** (one or two 25-liter tanks each, in model G546).
- **Screen** on the top part in model G546 for videos and nutritional information.
- **Water filters:** descaler or flavor.
- J-LINK Telemetry.
- Possibility of **payment systems** via card reader and bill acceptor.
- Jofemar bill acceptor.
- **Jofemar J-LINK card reader** or any card reader that operates on the MDB protocol.
- **Customization** capability.

PROGRAMMING

- Option for **data extraction** with J-SUITE via J-LINK.
- Includes **a display module where product information can be viewed.**
- DEX connector as the only solution for extracting accounting and **telemetry data in EVA-DTS format.**
- **Programming button** to access the different menus of the machine.
- Interactive adjustment of **programming options** using the machine's own graphic display.

CANISTER

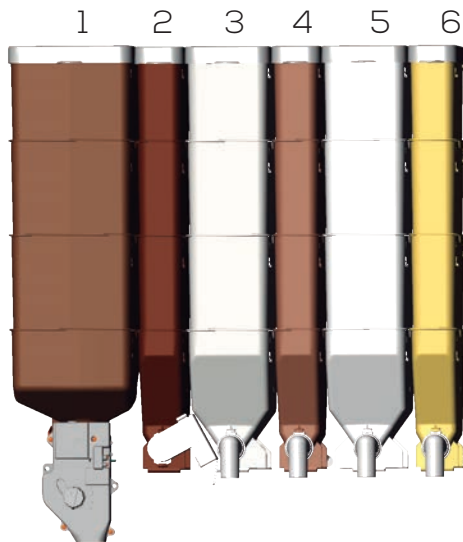

	CANISTER	CAPACITY (gr)	SERVICES
1	COFFEE BEANS	3.736	530
2	CHOCOLATE	2.020	115
3	MILK	2.770	-
4	DECAFFEINATION	780	480
5	OPTIONAL (Matcha tea, Broth, Chamomile...)	-	-
6	TEA	375	375
	SUGAR	4.620	-

*This information is general because it depends on the programming and the product extracted.

TELEMETRY



Our Jofemar electronic system J-LINK offers a wide range of functionalities to all our machines. One of them is the ability to use J-SUITE, our comprehensive and unified solution for machine management that allows you full control of the machine from anywhere in the world.

ADVANTAGES

- Compatibility across all Jofemar machines; you can use J-SUITE on all our products.
- Total stock control.
- Remote machine control from your computer, tablet, or mobile device.
- Compatible with other payment systems.
- Option to have a closed circuit card reader.
- Compatible with non-Jofemar machines through standard protocols.
- Control of product weight, cups and pallets.
- Control of product weight, cups and pallets.
- Control of product compositions.



COST CUTTING



**REAL-TIME STOCK
CONTROL**



**CUSTOMER
SATISFACTION**



**AGILITY IN
ACCOUNTING**



**OPERATIONS
ENHANCEMENT**



**ADMINISTRATIVE
OPTIMIZATION**



**ENHANCED
INFORMATION SECURITY**





Innovación
tecnológica

Fiabilidad



Jofemar
CORPORACIÓN

Ctra. Marcilla km 2
31350 Peralta · Navarra · España

Tel. +34 948 75 12 12

Fax +34 948 75 04 20

nacional@jofemar.com

www.jofemar.com



Tecnología
100% Jofemar



VE-CT137ES001 0924