



ESPLUS TM

ESPLUS TM R290 V8
ESPLUS TM REFR.V8
ESPLUS TM AMBIENT V8



ESPLUS™ BASIC V8



COLOR



ESPLUS™ V8

Our best-selling machine now even more advanced thanks to the innovative TM module. This exclusive component enables it to autonomously manage the entire product delivery process, making it a truly independent machine.



ANTI-VANDALISM PLATE
CLOSURE



CAPACITY AND VOLUME
OPTIMIZATION



J-SUITE



TOUCHSCREEN
DISPLAY



CUSTOMIZED SETUP TO SUIT
YOUR REQUIREMENTS



ADVERTISING
OPTIONS




LOW-ENERGY LED
LIGHTS

Main features



MACHINE NAME	Unpacked MEASUREMENT	WEIGHT	CONSUMPTION	ELEVATOR	COOLING UNIT	KEYBOARD	PAYMENT METHOD
ESPLUS™ BASIC	1835 x 800 x 1079	305kg	70W/230W	Yes	No	Keypad	Bank card reader
ESPLUS™ BASIC REFRIGER	1835 x 800 x 1109	337kg	370W/230V	Yes	Yes	Keypad	Bank card reader
ESPLUS™ TOUCH	1835 x 800 x 1102	305kg	70W/230V	Yes	No	Touchscreen 15,6"	Bank card reader
ESPLUS™ TOUCH REFRIGER	1835 x 800 x 1131	337kg	370W/230W	Yes	Yes	Touchscreen 15,6"	Bank card reader

ESPLUS™ TOUCH V8

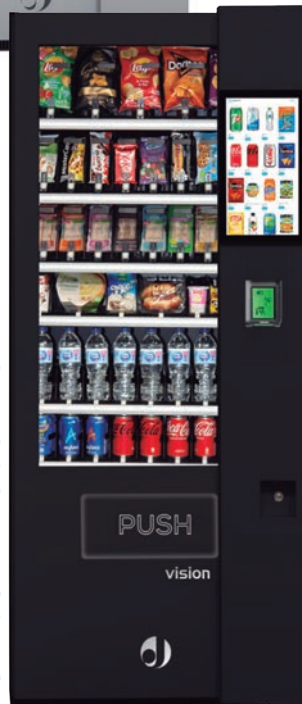

FEATURES

- Based on our VISION ESPLUS V8, but without the need for a control unit to manage delivery processes thanks to its TM MODULE.
- Large capacity for products and a large glass display to showcase the products.
- Payment via bank card reader.
- Temperature: with or without chiller unit.
- Multi-sale system, capable of delivering multiple products in a single elevator maneuver.
- Capacity for up to 8 trays with up to 10 height-adjustable channels each.
- Flexible configuration, channel and partition repositioning without tools.
- Correct sale detection through photocells.
- Continuous self-test operation.
- Expiration date programming by selection number or channel, inhibiting the sale of those products.
- FIFO system (First in, First out).

DESIGN

Our vending machines, thanks to their adjustable channel system, have the advantage of adapting to any type of product, in addition to incorporating high technology and an elegant, innovative design, offering a machine with high capacity and excellent product control.

- Elegant design with up to 3 door color options to choose from (white, black, and gray), with the option of customization with your corporate branding.
- Suitable for environments with low lighting thanks to its LED lighting on the product retrieval door and capacitive keypad or touchscreen display.
- Transparent front measuring 1,169x714 mm that allows for a wide view of our product.
- Product retrieval elevator with up to 4 heights to properly accommodate your product.
- TM module integrated on the side.
- Independent opening system with a key, for product replenishment and peripheral area.






OPTIONS

- It can incorporate a refrigeration unit.
- Capacitive keypad, ESPLUS™ BASIC, or touchscreen display, ESPLUS™ TOUCH.
- Up to 4 elevator positions, depending on the product height.
- Maximum flexibility to dispense any type of product, using pusher channels or paddle channels.
- Internal heater kit capable of maintaining the machine's interior up to 20°C above ambient temperature. An ideal solution to prevent product freezing in extreme cold conditions or to temper products that require it, as long as they do not saturate the interior with moisture.

PROGRAMMING

- General programming of all parameters directly on the machine using a button located inside.
- Dynamic programming: allows grouping of keys and sales channels in various ways.
- Option to extract data with J-SUITE using J-LINK.
- Thanks to its main menu, we have options to change the operator menu, technical menu, sales menu, machine menu, peripherals menu, settings menu, and graphic resources menu.
- Price programming from the sales menu, language change, extractor unions, advertising... all from the main menu.

CAPACITY DIAGRAM

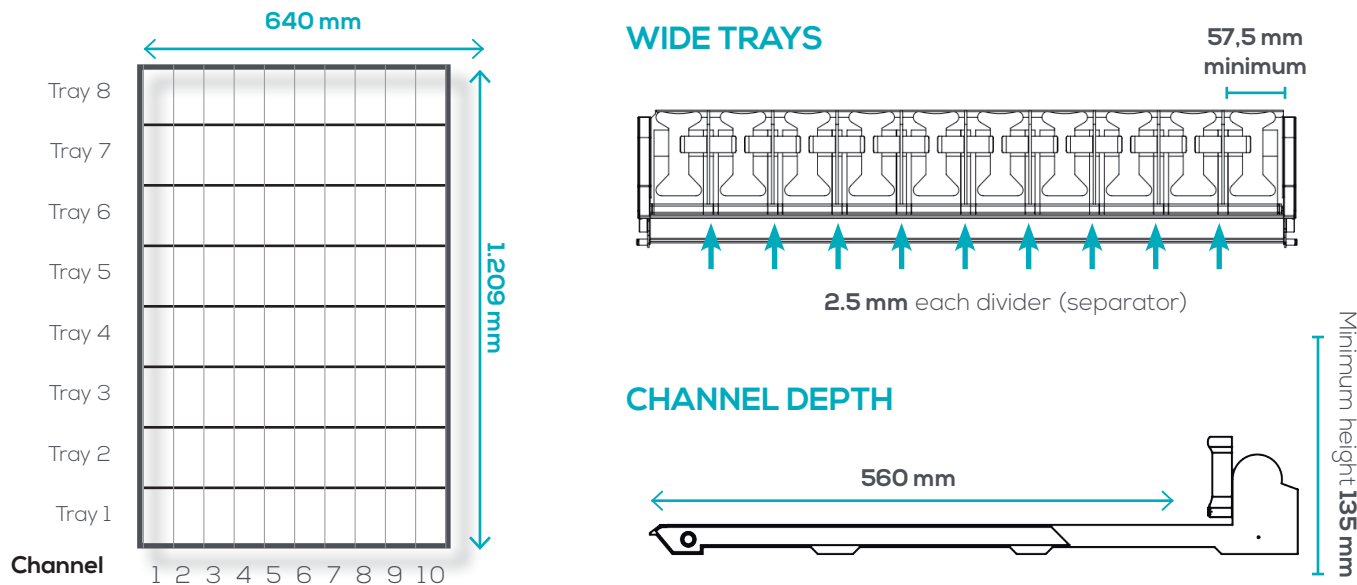

HEIGHT TABLE

Holes visible	Distance between trays	Product height pusher	Product height on pallet
8	135	94,5	76
10	162	121,5	103
12	189	148,5	130
14	216	175,5	157
16	243	202,5	184
18	270	229,5	211
20	297	256,5	238
22	324	283,5	265
24	351	310,5	292
26	378	337,5	319

Flexibility in tray between 1 to maximum of 10 motors.

TELEMETRY



Our Jofemar electronic system J-LINK offers a wide range of functionalities to all our machines. One of them is the ability to use J-SUITE, our comprehensive and unified solution for machine management that allows you full control of the machine from anywhere in the world.

ADVANTAGES

- Compatibility in all Jofemar machines, you can use J-SUITE on all our products.
- Total stock control.
- Remote control of machines from your computer, tablet, or mobile phone.
- Compatible with other payment systems.
- Option to have a closed circuit card reader.
- Compatible with non-Jofemar machines through standard protocols.
- Management of product images and waiting videos remotely.



COST CUTTING



**REAL-TIME STOCK
CONTROL**



**CUSTOMER
SATISFACTION**



**AGILITY IN
ACCOUNTING**



**OPERATIONS
ENHANCEMENT**



**ADMINISTRATIVE
OPTIMIZATION**



**ENHANCED
INFORMATION SECURITY**





Innovation
technology

Reliability



Jofemar
CORPORACIÓN

Ctra. Marcilla km 2
31350 Peralta · Navarra · España

Tel. +34 948 75 12 12

Fax +34 948 75 04 20

nacional@jofemar.com

www.jofemar.com



100% Jofemar
Technology



VE-CT208ES001 0324