

vision EasyCombo Touch

EASYCOMBO TOUCH V8
EASYCOMBO TOUCH° V8



VISION EASYCOMBO TOUCH BLUETEC V8



COLOR



EASY COMBO TOUCH

The optimal use of space, added to the exclusive extraction system patented by Jofemar, the autonomy by supporting multiple payment systems and a 10.1" screen make the Vision EasyCombo Touch the most suitable solution for the dispensing of refrigerated or ambient products.



ANTI-VANDALISM PLATE
CLOSURE



OPTIMIZATION,
CAPACITY AND VOLUME



J-SUITE



CONFIGURATION
ACCORDING TO NEEDS



INCLUSIVE
DESIGN



PRODUCT DELIVERY
DETECTION PHOTOCELLS



EASY FLEX EXTRACTION
SYSTEM



TOUCH
SCREEN

VISION EASYCOMBO TOUCH V8



Main features



MACHINE NAME	Unpacked MEASUREMENT	WEIGHT	CONSUMPTION	ELEVATOR	GCOOLING UNIT	KEYBOARD	PAYMENT METHOD
EASYCOMBO TOUCH V8	1835 x 802 x 1017	319kg	230V/60W	No	No	Touchscreen 10.1"	Configurable
EASYCOMBO TOUCH* V8	1835 x 802 x 1047	340kg	230V/555W	No	Yes	Touchscreen 10.1"	Configurable

FEATURES

- **Capacity** up to 6 trays of up to 10 channels and 2 trays of up to 7 channels, all of them adjustable in height.
- In degree model, **ECO refrigeration unit** with variable speed compressor, which **reduces electricity consumption**.
- **10.1" touchscreen** with interactive navigation. Product selection based on categories and support for multiple languages and sales modes.
- Possibility to **program the temperature** and have an **interior temperature** between 2°C and 25°C.
- Operation in environments with **65% maximum humidity**.
- **Detection of correct sales** by means of photocells.
- Continuous **self-test** of operation.
- **Expiration date programming** by selection number or channel. It inhibits the sale of these products.
- Flexible configuration. **Easy to change the position of channels and partitions without tools**.
- **Intelligent or manual auto-adjustment** of the push force for each channel, adapting to the characteristics of each product.
- Modular design. It allows you to adapt a multitude of peripherals and up to three satellite machines.
- **FIFO** (First in First out) **system**, which ensures continuous product renewal.

DESIGN

Our Easy Combo Touch V8 machines, thanks to their adjustable channel system, have the advantage of adapting to any type of product. In addition, they have cutting-edge technology and an elegant and innovative design, resulting in a machine with high capacity and great product control.

- Elegant and robust design with four different finishes for the door (white, black or Bluetec) and with the option of personalisation with corporate branding.
- Product selection via touch screen.
- LED lighting with selective on/off programming.
- Thermally insulated front safety glass with 16mm argon chamber of 1100x461 mm, which allows a wide view of the product and offers protection and great insulating capacity.
- Furniture structure with modular design and protected against corrosion and rust.






OPTIONS

- Jofemar card and key reader or any card reader that works in MDB protocol.
- Option to install heating kit for machines with a **cooling group**.
- **Vandal-proof coin entry.**
- J-Link telemetry and communication device with J-Suite Vending management platform.
- Online operation with **real-time control of users and sales.**
- Up to **three satellite machines** and up to **8 Lockers or Lockers° modules.**
- Machine-controlled **external microwave module** and programmable heating times by selection.


PROGRAMMING

- Integrated **accounting data programming and visualization** system accessible from the machine. DEX port for accounting data output.
- **Dynamic programming:** allows the grouping of keys and sales channels in different ways.
- **Price programming** from the sales menu, language change, extractor unions, advertising... all from the main menu.
- USB **upgradeable** with machine cloning option.
- Programmable dispensing in four modes. Option of vending only, dispensing only, or vending and dispensing combined depending on the product.
- Possibility to integrate images as screensavers, incorporate product images and customize parameters and design of the user interface.

CAPACITY DIAGRAM

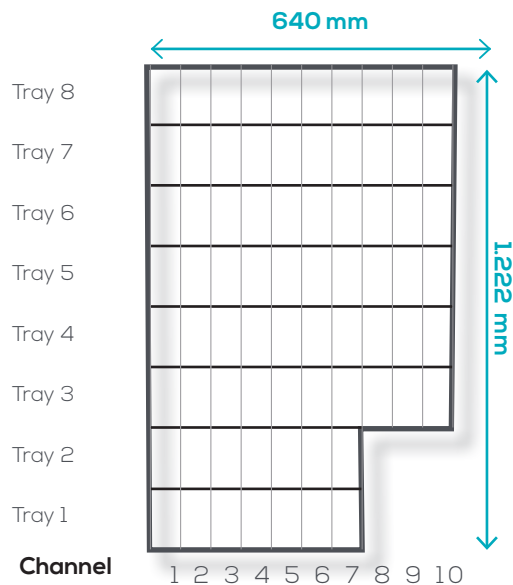

WIDE TRAYS

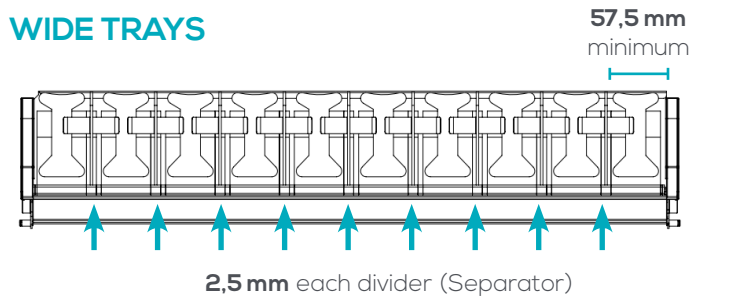

CHANNEL DEPTH



TABLA DE ALTURAS

Holes visible	Distance between trays	Product height pusher	Product height on pallet
8	135	94,5	76
10	162	121,5	103
12	189	148,5	130
14	216	175,5	157
16	243	202,5	184
18	270	229,5	211
20	297	256,5	238
22	324	283,5	265
24	351	310,5	292
26	378	337,5	319

Flexibility in tray between 1 to maximum of 10 motors.

TELEMETRY



Our Jofemar electronic system **J-LINK** offers a wide range of functionalities to all our machines. One of them is the ability to use **J-SUITE**, our comprehensive and unified solution for machine management that allows you full control of the machine from anywhere in the world.

ADVANTAGES

- Compatibility on all Jofemar machines. It is possible to use J-SUITE in all our products.
- Total stock control.
- Remote control of the machines from your computer, tablet or mobile.
- Compatible with other payment systems.
- Option to have a closed circuit card holder.
- Compatible with non-Jofemar machines through standard protocols.
- Efficiency in the management of accounting data.
- Technical and administrative alerts.



COST CUTTING



REAL-TIME STOCK
CONTROL



CUSTOMER
SATISFACTION



AGILITY IN
ACCOUNTING



INCLUSIVE
DESIGN




PRODUCT DELIVERY
DETECTION
PHOTOCELLS



EASY FLEX
EXTRACTION
SYSTEM



TOUCH
SCREEN

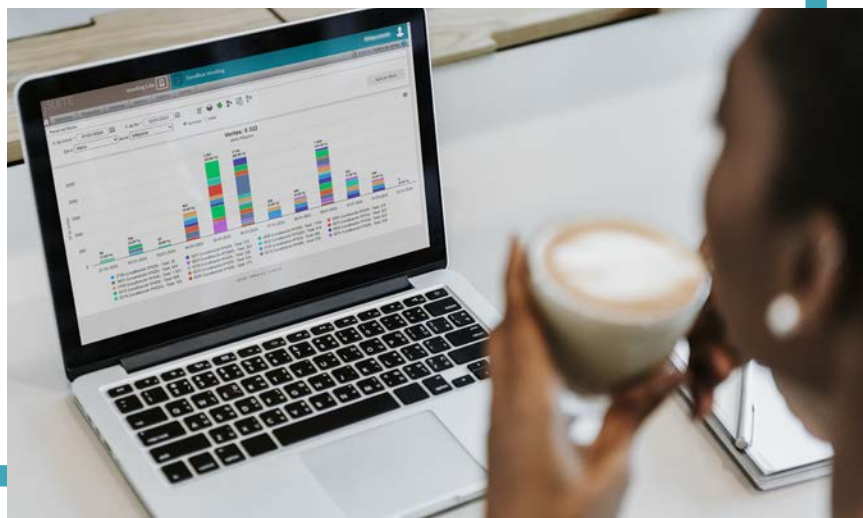



Innovation
technology

Reliability



Jofemar
CORPORACIÓN

Ctra. Marcilla km 2
31350 Peralta · Navarra · España

Tel. +34 948 75 12 12

Fax +34 948 75 04 20

nacional@jofemar.com

www.jofemar.com



100% Jofemar
Technology

CE



VE-CT208ES0010626